

REINMEER

www.reinmeer.com



**STAINLESS STEEL
PRESSURE TRANSMITTER
WITHOUT GAUGE**

RM-P04

[Data sheet](#)

Pressure transmitter
For demanding industrial applications

STAINLESS STEEL PRESSURE TRANSMITTER WITHOUT GAUGE MODEL RM-P04

REINMEER

Data sheet Model RM-P04

Application Areas

Oil & Gas Industry
Water & Wastewater Treatment
Food & Beverage Industry
Chemical & Petrochemical Industry
Hydraulics & Pneumatics
HVAC Systems
Pharmaceutical Industry
Marine & Shipbuilding

Features

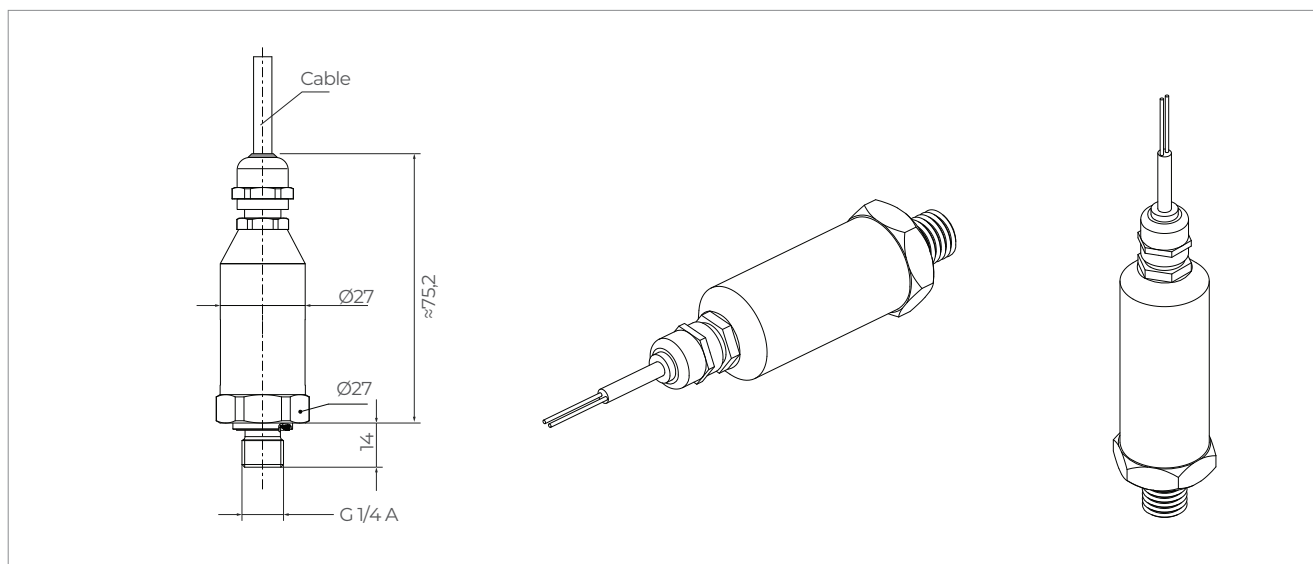
- Wide Range: From -1 bar up to 2000 bar for versatile use.
- High Accuracy: Precision rating of $\leq 0.2\%$ FS.
- Durable Build: Robust AISI 316L stainless steel housing.
- Reliable Sensor: High-stability piezoresistive measuring cell.
- Flexible Output: Supports 4-20 mA, HART, and 0-10V signals.
- Thermal Strength: Operates between -40°C and 135°C .
- Industrial Protection: IP65 and IP67 rated against dust/water.
- Compact Design: Small footprint ($\varnothing 27\text{mm}$) for easy installation.

Description

Reinmeer's stainless steel pressure transmitter without display is a high-performance solution engineered for the precise measurement of liquid, gas, and steam pressure in demanding industrial environments. Featuring a rugged AISI 316L stainless steel body and advanced piezoresistive sensing technology, this device ensures long-term stability and exceptional reliability even under harsh conditions. Its compact, display-less design allows for seamless integration into tight spaces, while its standard output signals (such as 4-20 mA or 0-10 V) guarantee full compatibility with modern automation systems. Offering high accuracy and a broad operating temperature range, this transmitter is an ideal choice for diverse sectors ranging from petrochemicals to food processing.



Structure



Pressure Range (BAR)	Min. -1 / Max. 2000
Overload (BAR)	F.S × 2

TECHNICAL FEATURES






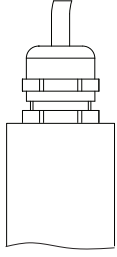
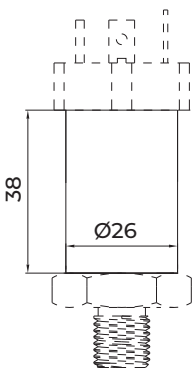
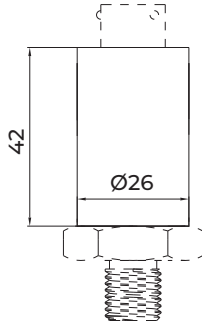
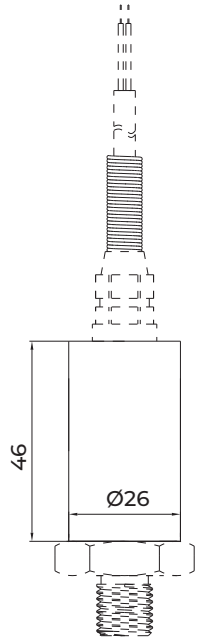
Working Principle	Measuring Principle	Piezoresistive Measuring Cell
Inputs	Measurement Variables	Relative and Absolute Pressure
	Measuring Range	Max. 2000 BAR
Outputs	Current Output	4-20 mA / 4-20 mA + HART / Optional 0-10 V (U = 10 V) / 0.02 A
	Load	(U-10 V) / 0,02 A
Precision	Accuracy	Full Scale ≤ %0,2
	Zero Point	±0,2 mV/V
Temperature Effect	Zero	±0,02 % FS / K
Operating Conditions	Operating Temperature	-40° ~ 135°C
	Ambient Temperature	-25° ~ 85°C
	Protection Class	IP65
Power Supply	Power Supply Voltage	10...36 VDC
Materials	Sensor	Stainless Steel 316L, Ceramic
	Process Connection	Stainless Steel 316L, Hastelloy C, other materials
	O-Ring	Viton
	Outer Box	Stainless Steel 316L
	Terminal	Plastic
Process Connections		G 1/4", G 1/2", G 1/2" flush, clamp, flange, and others
Size and Weight	Weight	Approximately 0.25 kg
	Size	Ø 27 × 112 mm

STAINLESS STEEL PRESSURE TRANSMITTER WITHOUT GAUGE MODEL RM-P04













REINMEER

Data sheet Model RM-P04

Electrical interface

P01	P04	P05
  <p>DIN43650 (standard)</p>	  <p>circular connector with 4 pins</p>	  <p>PVC cable Ø 5mm - 2 wires for current loop - 3 wires for voltage output - cable length (L) should be specified</p>
<h2>Electronics housing (casing)</h2>		
 <p>38 Ø26</p>	 <p>42 Ø26</p>	 <p>46 Ø26</p>

MECHANICAL CONNECTION

	M20x1.5	G1/2	G1/4
Dimensions (mm)			
	G1/8	NPT1/2	NPT1/4
Dimensions (mm)			
	M20x1.5-c	G1/2-c	G1/2"(F) M20 x 1.5(F)
Dimensions (mm)			
	G1/4"(F)	1/4NPT(F)	1/4NPT(F)
Dimensions (mm)			

STAINLESS STEEL PRESSURE TRANSMITTER WITHOUT GAUGE MODEL RM-P04

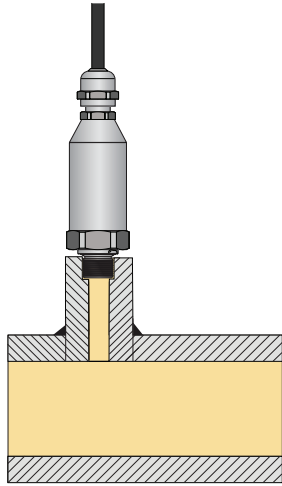
REINMEER

Data sheet Model RM-P04

Mounting Method


Pipeline installation

90°



Pipeline installation

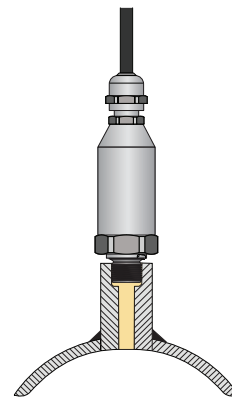90°



Contact us

Address :

Reinmeer Office Address
Eutiner Str.12,22143
Hamburg, Germany
reinmeer@reinmeer.com